
CATALOG

WORLD SALES AREA



PROFESSIONAL MANUFACTURER

LED LIGHT FIXTURE

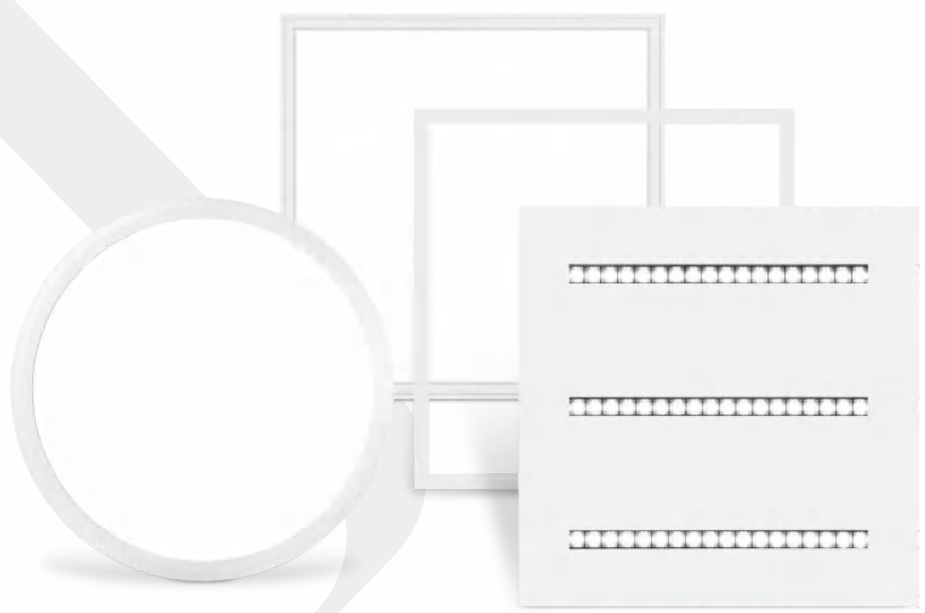

Head Offce: Room 316, No. 66, Sanhui Road, Yiqiao Town, Xiaoshan District, Hangzhou City, Zhejiang Province

Factory: No. 758, Jiangxian Road, Nanhu District, Jiaxing City, Zhejiang


E-mail:Sales@gimocn.com

Brief introduction


Hangzhou Gimo Technology Co., Ltd was founded on 2015, which is a LED Lighting fixture company with R&D, producing and sales as a whole. To make more environmental protection and energy saving lighting safer for the enterprise mission. In the light of happiness to light up every corner for tnterprise vision. To service customers, accuracy and truth-seeking, strengthh union of tne business development philosophy. To take the user's needs as own responsibility. And the established brand deeply praised by dometic and foreign consumers.

Gimo always insist on quality as a fundamental technological innovation as the driving force, be brave, pragmatic, high efficiency, dedicated and harmonious as spirit, high execution as policy to devlop and produce LED panel light, LED Ceiling light, LED Tri-proof,LED Down light and etc. Striving to become one of the leading enterprises of the domestic LED lighting fixtures. Introducing modern and advanced management

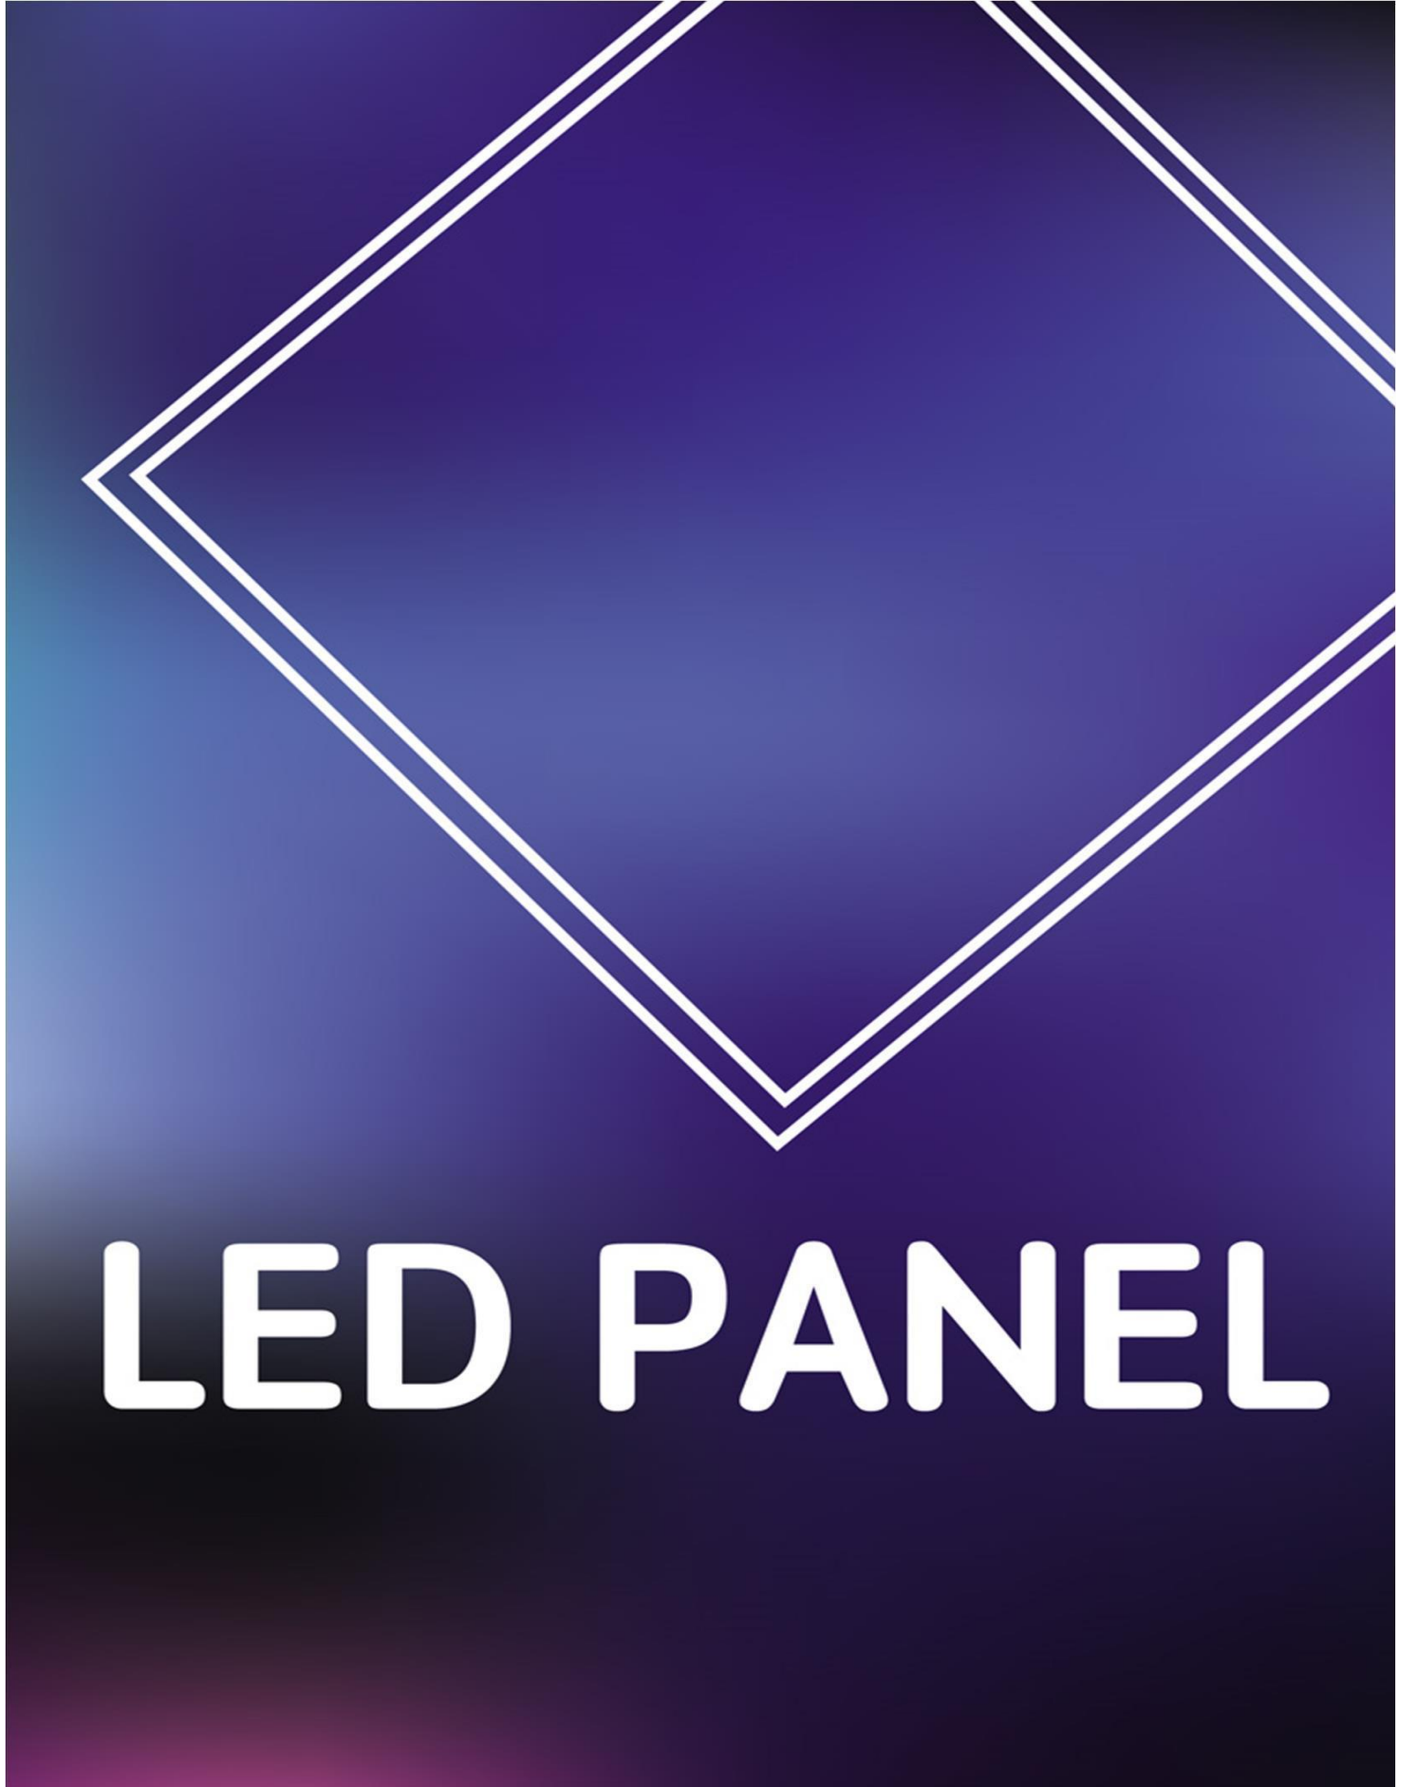


LED PANEL

LED SLIM EDGE-LIT PANEL LIGHT

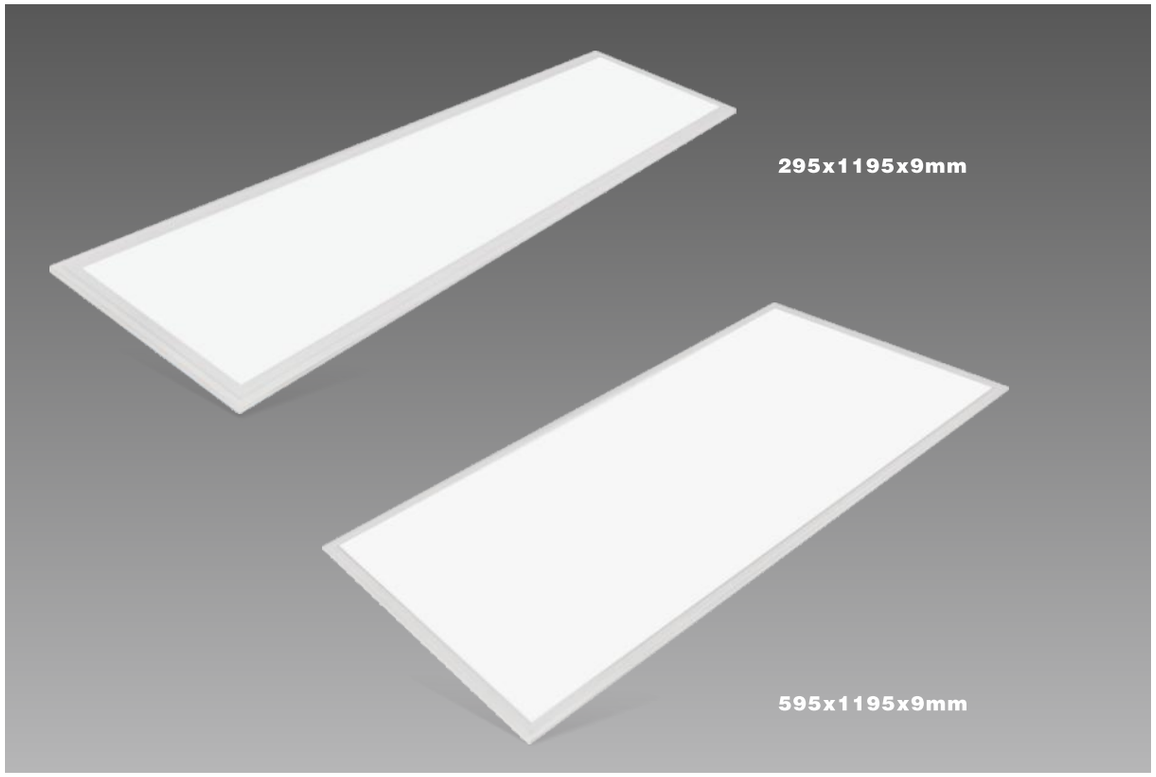


Product features:

1.Non-flickering,No Mercury, no UV or IR radiation.
2.New technology of LGP-MS(silk-printing free), less yellowish, excellent uniform light and high light efficiency. PMMA LGP for options.
3.Using high quality SANAN SMD LED chip as light source.
4.UGR<16/19 for options.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLG-3030	295*295*9	12/24	2700-6500K	Ra≥80/90	80-100LM/W	960-2400LM	20pcs/ctn
ZLG-3060	595*295*9	18/24/36	2700-6500K	Ra≥80/90	80-100LM/W	1440-3600LM	10pcs/ctn
ZLG-6060	595*595*9	36/40/48	2700-6500K	Ra≥80/90	80-140LM/W	2880-5760LM	10pcs/ctn
ZLG-30120	295*1195*9	36/40/48	2700-6500K	Ra≥80/90	80-140LM/W	2880-5760LM	10pcs/ctn
ZLG-60120	595*1195*9	60/72	2700-6500K	Ra≥80/90	80-140LM/W	4800-8640LM	4pcs/ctn

SQUARE SURFACE PANEL WHITE&BLACK

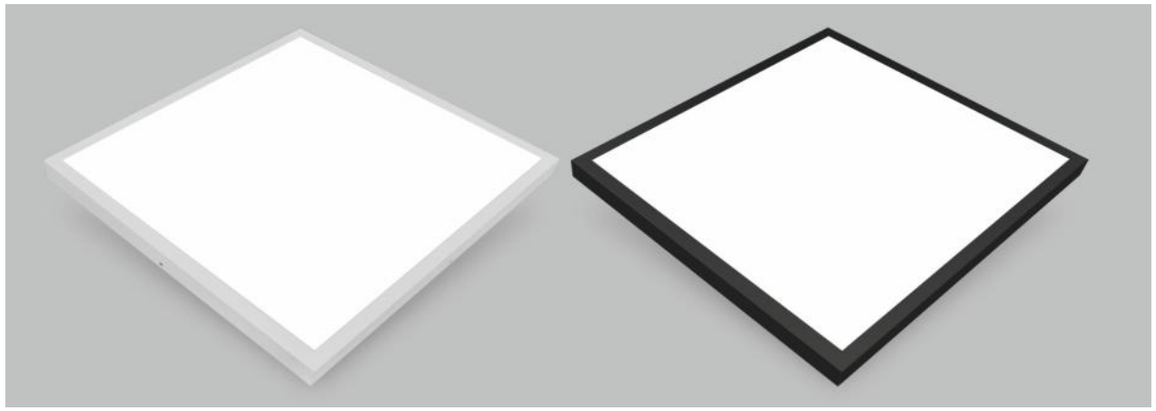


Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLS-3030	300*300*35	12/24	2700-6500K	Ra≥80	80-100LM/W	960-2400LM	10pcs/ctn
ZLS-3060	300*600*35	24/36	2700-6500K	Ra≥80	80-100LM/W	1920-3600LM	5pcs/ctn
ZLS-4040	400*400*35	28/36	2700-6500K	Ra≥80	80-100LM/W	2240-3600LM	5pcs/ctn
ZLS-6060	600*600*35	36/40/48/64	2700-6500K	Ra≥80	80-100LM/W	2880-6400LM	5pcs/ctn
ZLS-30120	300*1200*35	36/40/48/64	2700-6500K	Ra≥80	80-100LM/W	2880-6400LM	5pcs/ctn
ZLS-60120	600*1200*35	64/72	2700-6500K	Ra≥80	80-100LM/W	5120-7200LM	4pcs/ctn

ROUND SURFACE PANEL WHITE&BLACK



Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLS-D300	Φ300*35	12/24	2700-6500K	Ra≥80/90	80-100LM/W	960-3600LM	10pcs/ctn
ZLS-D400	Φ400*35	24/36	2700-6500K	Ra≥80/90	80-100LM/W	1920-3600LM	5pcs/ctn
ZLS-D500	Φ500*35	40/48	2700-6500K	Ra≥80/90	80-100LM/W	3200-4800LM	5pcs/ctn
ZLS-D600	Φ600*35	40/48/64	2700-6500K	Ra≥80/90	80-100LM/W	3200-6400LM	5pcs/ctn

LED BACKLIT PANEL LIGHT

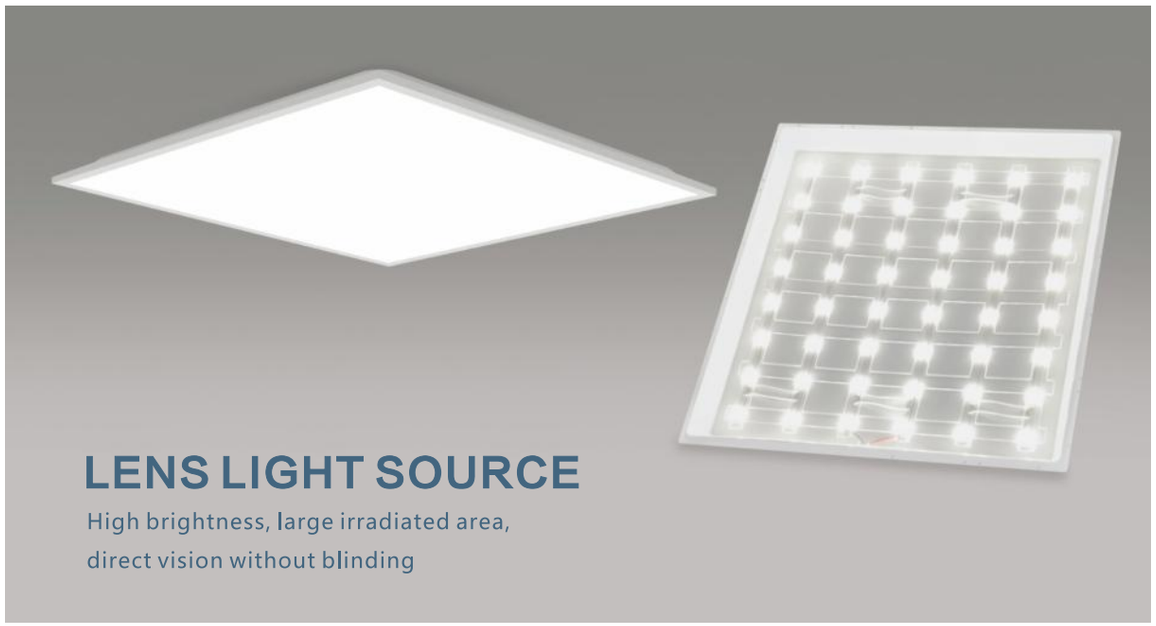







Product features:

1.High quality lens filtered directly.
2.Lower cost,No LGP never turn yellow,Ultra thin up to 20mm,better uniformity.
3.High light efficiency up to 80-180lm/w.
4.We have SMT machines,backcover production lines,automatic screw lines...etc.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLB-3030	295*295*30	12/24	2700-6500K	Ra≥80/90	80-100LM/W	960-2400LM	10pcs/ctn
ZLB-3060	295*595*30	18/24/36	2700-6500K	Ra≥80/90	80-100LM/W	1440-3600LM	10pcs/ctn
ZLB-6060	595*595*30	36/40/48	2700-6500K	Ra≥80/90	80-180LM/W	2880-6000LM	10pcs/ctn
ZLB-30120	295*1195*30	40/48/60	2700-6500K	Ra≥80/90	80-180LM/W	2880-6000LM	10pcs/ctn
ZLB-60120	595*1195*30	64/72	2700-6500K	Ra≥80/90	80-180LM/W	4800-8640LM	5pcs/ctn

NARROW FRAME BACKLIT PANEL

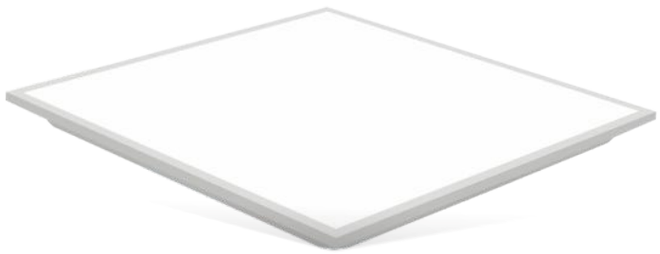

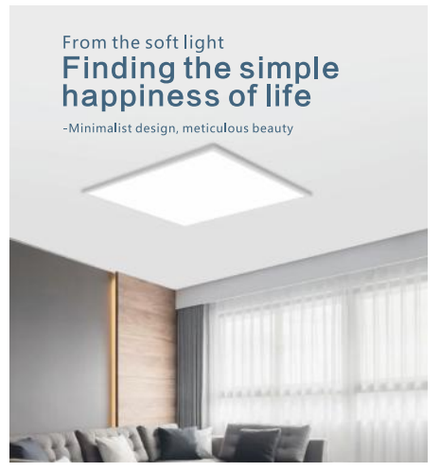

Comparing with old versions

*New narrow frame width is only 15mm.
*Make more brightness area.

*New model have less srews on backcover.
*Make better performance.



Product features:

1.No LGP, never go to yellowish.
2.Ultra thin model, only 20/25mm thickness.
3.High efficiency, can make up to 20W,180LM/W.



Newly upgraded slim design, thickness of only 25mm without fear of low ceiling challenges, release the top space, say goodbye to the pressure of floor height

3CCT APPLICATIONS DISPLAY





Warm White

Warm timbers complement white surfaces that reflect slightly yellow light,like being immersed in warm pure cotton wool.It comes more homelike when resting.



Natural White

Let people feel more comfortable when working, Warm and uniformlight, no dark area, Non-flickering eye-protection. Let you enjoy the leisure time.




White

In very warm climates,using white and cool colors exclusively can make an entire house seem more comfortable. Being brightness while working.

3CCT SWITCH DIMMABLE PANEL
3CCT MODEL



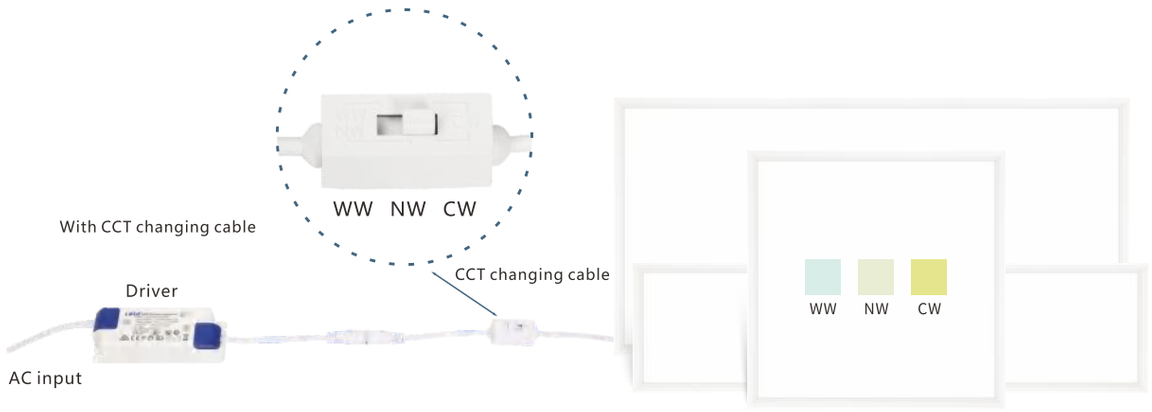


Product features:

1.3CCT Switch dimmable, 2.4G and Dali dimmable are also available.
2.3CCT options(Warm White,Natural White,White),lower operation cost and the pressure of stock.
3.Light distribution on walls and ceilings,and high visual comfort.
4.All the panels(slim,backlit,frame)are available to make 3CCT.
5.Easy for recessed on ceiling or hanging installation.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLG-6060-3CCT	595*595*9	40/48	2700-6500K	Ra≥80	70-75LM/W	2800-3600LM	6pcs/ctn
ZLG-30120-3CCT	295*1195*5	40/48	2700-6500K	Ra≥80	70-75LM/W	2800-3600LM	6pcs/ctn
ZLG-60120-3CCT	595*1195*9	40/48	2700-6500K	Ra≥80	70-75LM/W	2800-3600LM	4pcs/ctn
ZLG-6060-3CC-E	595*595*9	40/48	2700-6500K	Ra≥80	80-90LM/W	3200-4320LM	6pcs/ctn
ZLG-30120-3CCT-E	295*1195*9	40/48	2700-6500K	Ra≥80	80-90LM/W	3200-4320LM	6pcs/ctn
ZLG-60120-3CCT-E	595*1195*9	40/48	2700-6500K	Ra≥80	80-90LM/W	3200-4320LM	4pcs/ctn

FRAME/BORDERLINE PANEL LIGHT

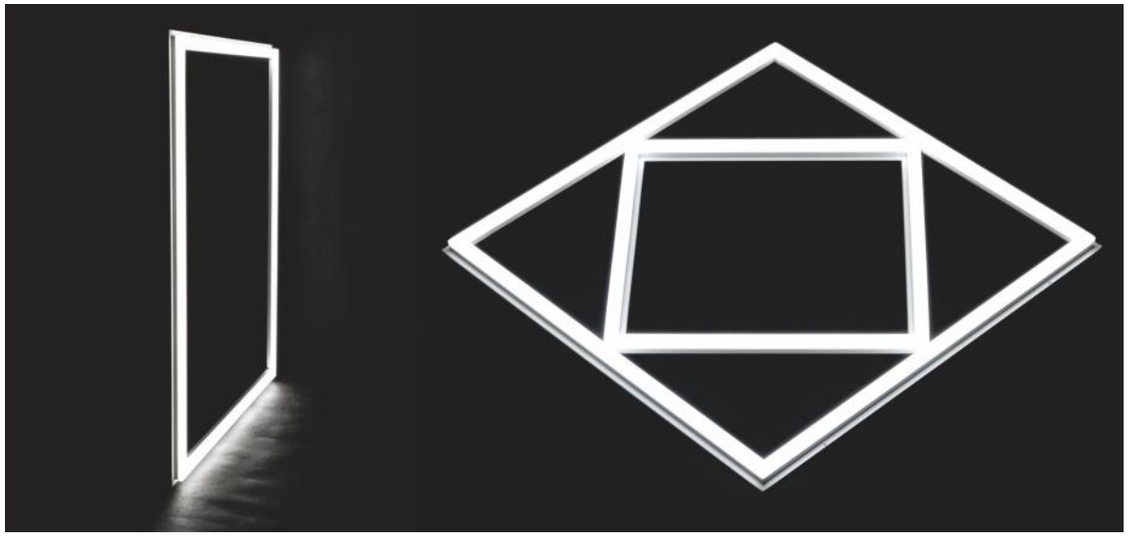






APPLICATION DISPLAY



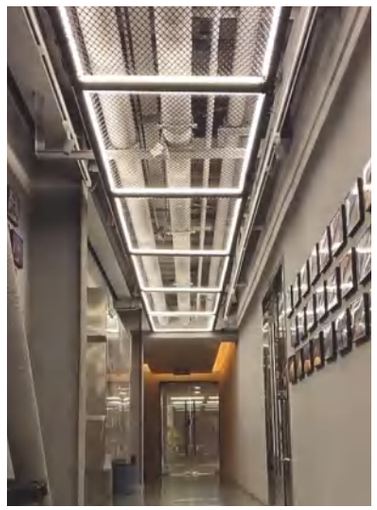



Areas of Application:
Offices,Meeting rooms,Airport lounges,Super Market,
Bank & ATM outlets,Shipping Mall,Schools,Hospital...etc.

Product features:

1.Simple design,Functional,Decorative
Can be put together into a variety of fashionable shapes.

2.SMD LED Chip, San'an
High brightness,Energy Saving.

3.Thick aluminum frame
Better heat dissipation.

4.Using PC cover
With high light transmission.

5.Long life span
With 2 years warranty.

6.High light efficiency
Up to 100lm/w.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLF-6060	595*595*15	40/48	2700-6500K	Ra≥80	80-100LM/W	3200-4800LM	10pcs/ctn


SPLICING FRAME/BORDERLINE PANEL



Unique splicing design:

Superb Shipping Cost Saving:






595x595mm

Product features:

1.Full PC material body, make soft light.
2.Unique splicing design, easy to install.
3.Minimum package CBM to save much shipping cost.
4.One 40HQ container can load around 20,000pcs.
5.3 in 1 switch CCT is available.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLF-6060	595*595*15	36	2700-6500K	Ra≥80/90	100-120LM/W	3600-4320LM	FULL PC
ZLF-6060	595*595*15	40	2700-6500K	Ra≥80/90	100-120LM/W	4000-4800LM	FULL PC
ZLF-6060	595*595*15	48	2700-6500K	Ra≥80/90	100-120LM/W	4800-5760LM	FULL PC

OTHER PANELS

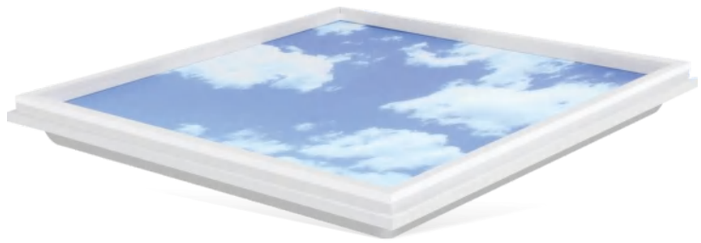



Borderline&Sky Backlit Panel

Product features:

1.Borderline and Sky panel combine into one backlit panel.
2.Only 1 driver with 2 connectors, save cost.
3.Different pictures can be printed for options.







Moon Backlit Panel

Product features:

1.When turn off, it just looks like a normal panel.
2.When turn on, just the round area is lighting, looks like a moon.


PICTURE PANEL(2D/3D)




Product features:


1.Optional montage types: 4pcs/set, 6pcs/set, 8pcs/set.
2.Fashionable design(2D/3D),Safe and easy to install,flexible to use any where.
3.All kinds of pictures are fitting in different scene and can be customized.
4.Slim and backlit panel are both for options.



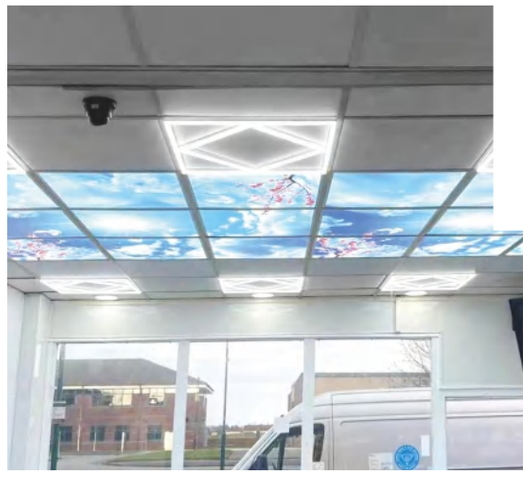

MOTION SENSOR PANEL

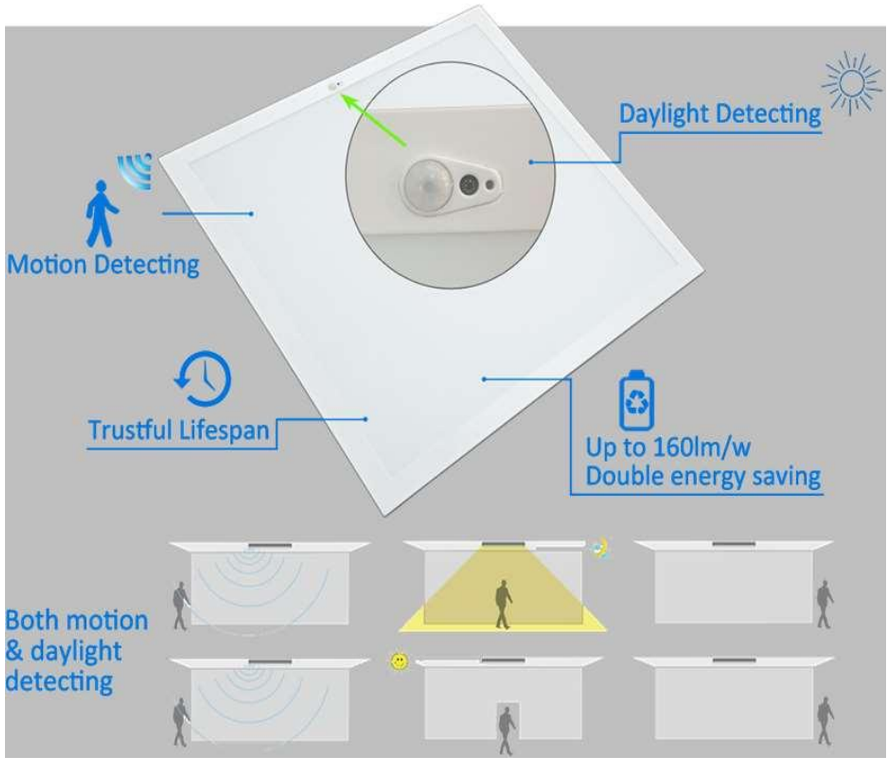

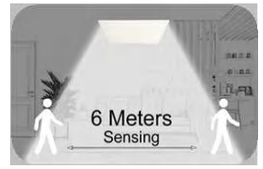





Product features:

1. 80% electricity cost down
2.Motion sensor, daylight sensor, high luminous efficiency
3. Microwave / PIR sensor optional
4. Tuya bluetooth wireless control and CCT tunnable white optional

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLMS-606030-MIC	595*595*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS
ZLMS-606030-PIR	1195*295*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS

IP65 PANEL









Product features:

1. IP65 water-proof
2. Comply with CE-LVD & EMC & CB & NEW ERP
3. Suspension kit /wall mounting/spring kit

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLWT-606030	595*595*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS
ZLWT-123030	1195*295*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS

SMART PANEL



DALI

ZigBee


matter

Product features:

1. Multiple smart control solutions optional
2. 2.4G Remote Control / WiFi + Bluetooth / Zigbee / DALI DT8 …
3. Brightness+ CCT Tunable
4. Professional R&D solutions customizable

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLSM-606030	595*595*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS
ZLSM-123030	1195*295*30mm	30W	2700K-6500K	Ra>80/90	100-140LM/W	3000-4200LM	AL+ PS

FRAMELESS PANEL LIGHT

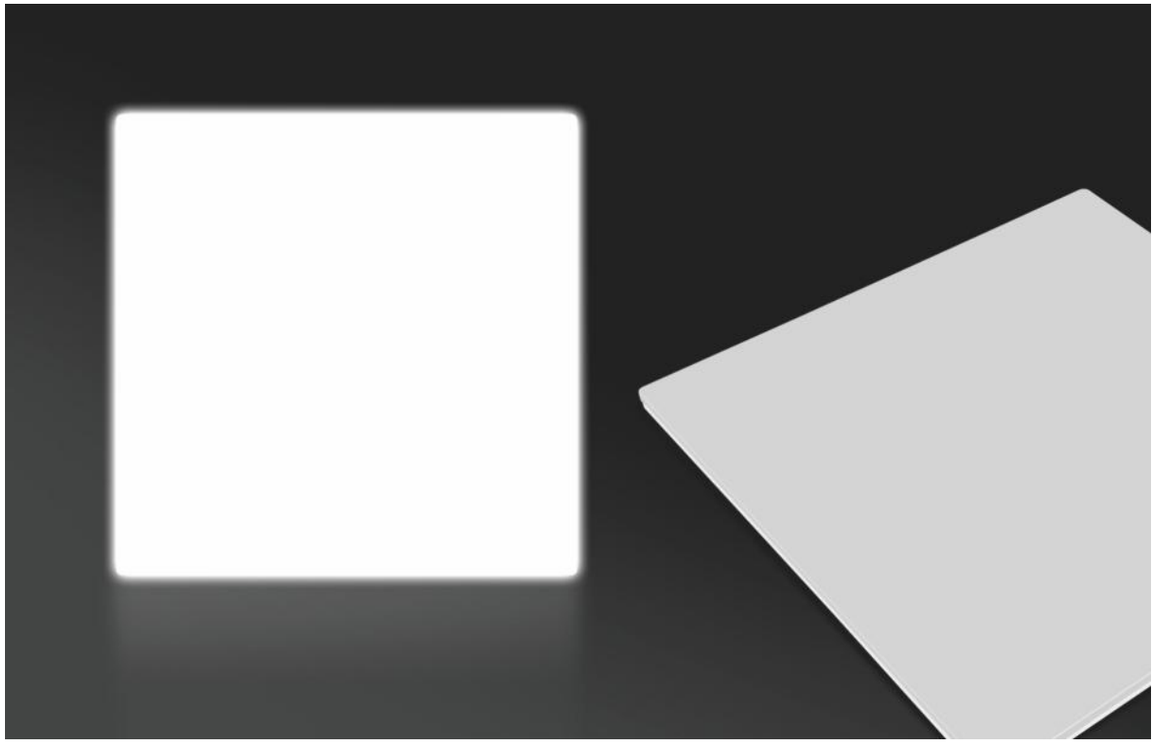



Product features:

1.No frame, simple and elegant design, full brightness area.
2.PMMA cover, makes uniform and soft light.
3.Backlit panel, super thin, only 4cm, save volume and cost.
4.Internal driver, surface and hanging mounting, easy to install.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLBF-606036	595*595*40	36W	2700-6500K	Ra≥80/90	100-120LM/W	3600-4320LM	PMMA cover+Iron
ZLBF-606040	595*595*40	40W	2700-6500K	Ra≥80/90	100-120LM/W	4000-4800LM	PMMA cover+Iron
ZLBF-606048	595*595*40	48W	2700-6500K	Ra≥80/90	90-100LM/W	4320-4800LM	PMMA cover+Iron

FRAMELESS PANEL LIGHT



RECESSED TROFFER ARCHITECTURAL LUMINAIRE



Start with familiar installation methods and configurations, add high-quality, energy saving LED technology. Utilizes highly reliable and efficient LED boards and driver.

Provides general lighting perfect for a wide variety of applications. It's a highly efficient andeconomical solution for any energy challenged recessed lighting project





Diffuser

PC in ribbed provides comfortable even illumination



Len retainers

Die-formed steel with highly reflective matte texture, so it's integrated into the housing



LED boards

Aluminum PCB with SMD 2835



Cap

Die-formed steel provides good protection

Housing

Metal with highly reflective matte texture

Driver

Isolated and with constant current



LED

TROFFER LIGHT

Housing:

Die-formed, cold rolled steel.Metal housing provides excellent thermal transfer to extend component life.

PC diffuser in ribbed provides even illumination with comfortable appeal.

Finish:

Highly reflective, matte powder coat white paint for high efficiency.
Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

Electrical:

Fixtures are factory pre-wired and tested for all circuits. LED driver is accessible from above.

LED boards are accessible from below by removal of the lens. Lens removal is tool-free by pushing to one end and compressing the sides.

Warranty:


TM-21 predicted L70 lumen maintenance up to 50,000 hours.
5 years manufacturer's limited warranty.


General notes:

All options are factory installed.
All accessories are field installed

LED TRPFFER LIGHT







5100 nominal delivered lumens

Product features:

1. Total luminaire efficacy as high as 130 LPW (lumens per Watt). Optional 145LPW UGR<19.

2. Electrical: 220-240V,50/60Hz,PF>0.9, THD<10%, Flicker free. Off State Power 0.5W, Mains surge immunity:L-N 1KV,L-FG N-FG 2KV.


3. Optional driver: Lifud, Philips, Eaglerise etc. Consult Factory for other available drivers.


4. Available in different lumen to suit the needs of various applications.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLBR-606025	595*595*60	25W	3000K-6000K	CRI80	130LM/W	3200LM	Aluminum
ZLBR-606030	595*595*60	30W	3000K-6000K	CRI80	130LM/W	3900LM	Aluminum
ZLBR-606038	595*595*60	38W	3000K-6000K	CRI80	130LM/W	4900LM	Aluminum

LED MODULAR PANEL LIGHT

NO STROBOSCOPIC
EYE-CARE

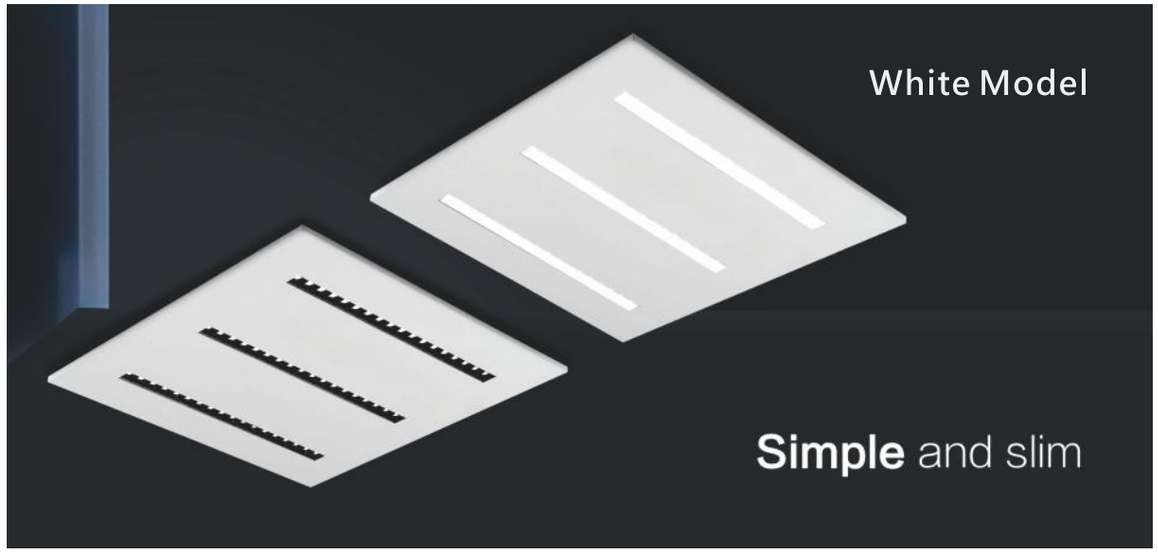

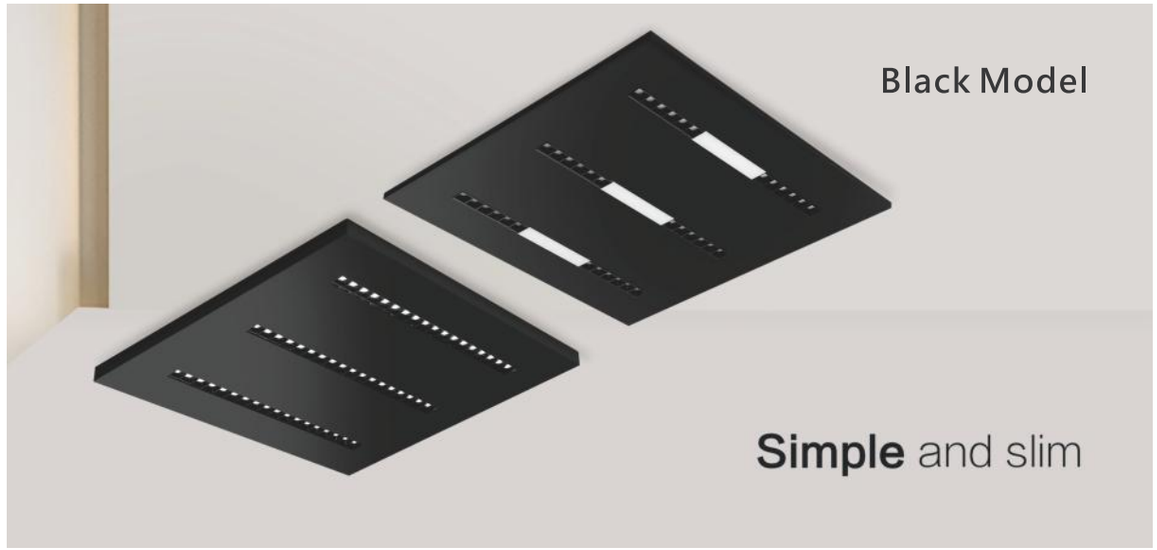


UGR<16 Glare Free Lighting Performance:

The UGR<16 LED modular panel Light is down direct lighting design, ultra slim with only18mm thickness, which makes the light higher lumen than traditional panel light, what ismore, the glare free design makes the light more safety on our eyes.


LED MODULAR PANEL LIGHT





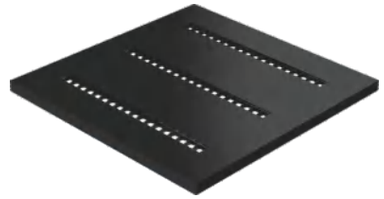



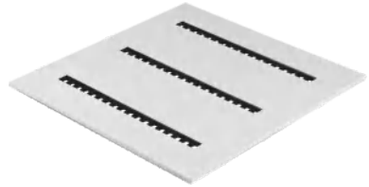



Product features:

1.UGR<16 Non-flicker, protect eye, to help the staff concentrate on their work.
2.Compared with traditional panel light. 150lm/W UGR<16 LED modular panel can save 55% of electricity and after service.
3.Greatly improve the energy efficiency of the system. Reduce energy consumption and operating costs.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLBM-606036	595*595*18	36W	2700-6500K	Ra≥80/90	120-150LM/W	4320-5400LM	Iron
ZLBM-606040	595*595*18	40W	2700-6500K	Ra≥80/90	120-140LM/W	4800-5600LM	Iron
ZLBM-606048	595*595*18	48W	2700-6500K	Ra≥80/90	100-120LM/W	4800-5760LM	Iron

LED ROTATABLE BATTEN




Product features:

1. Adjust abgle 120degree
2. Material of Frame and back cover: PVC Lamp + PC Cover
3. Input Plug in
4. 3CCT Switch
5. Comply with CE-LVD & EMC & CB & NEW ERP

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZL-YT5-E4	297*24*61	4W	2700-6500K	Ra≥80	100LM/W	400LM	PVC+PC
ZL-YT5-E8	545*24*61	8W	2700-6500K	Ra≥80	100LM/W	800LM	PVC+PC
ZL-YT5-E12	835*24*61	12W	2700-6500K	Ra≥80	100LM/W	1200LM	PVC+PC
ZL-YT5-E16	1134*24*61	16W	2700-6500K	Ra≥80	100LM/W	1600LM	PVC+PC

LED ROTATABLE BATTEN

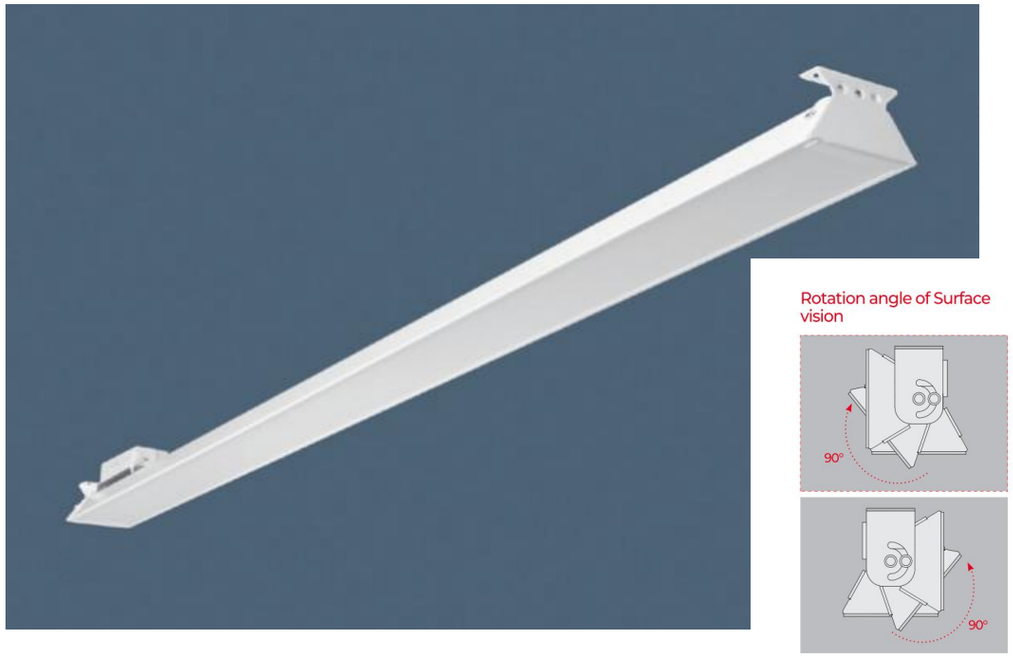

Product features:

1. Total luminaire efficacy as high as 130 LPW (lumens per Watt). Available in different lumen to suit the needs of customer. UGR<19

2. 220-240V,50/60Hz,PF>0.9, THD<10%, Flicker free. Off State Power 0.5W, Mains surge immunity:L-N 1KV,L-FG N-FG 2KV.

3. Available in different Length (<1808mm) and lumen to suit the needs of various applications.

4. Optional driver: Lifud, Philips, Eaglerise etc. Consult Factory for other available drivers.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZL-YT6-E18	1200*70*73	18W	2700-6500K	Ra≥80	130LM/W	2300LM	Aluminum
ZL-YT6-E24	1200*70*73	24W	2700-6500K	Ra≥80	130LM/W	3100LM	Aluminum
ZL-YT6-E36	1200*70*73	36W	2700-6500K	Ra≥80	130LM/W	4600LM	Aluminum
ZL-YT6-E48	1200*70*73	48W	2700-6500K	Ra≥80	130LM/W	6200LM	Aluminum

PANEL MOUNTED ACCESSORIES

T- Frame



PANEL MOUNTING ACCESSORIES

SURFACE MOUNTING FRAME







Product features:

1.Suit for ceiling surface mounting.
2.Aluminum material with white painted.
3.Plastic connector to make easy installation.
4.No hole on the connector makes the surface looks better.

Hook



Fast Connector




Suspension Hanging Lines




Recessed Spring Clips



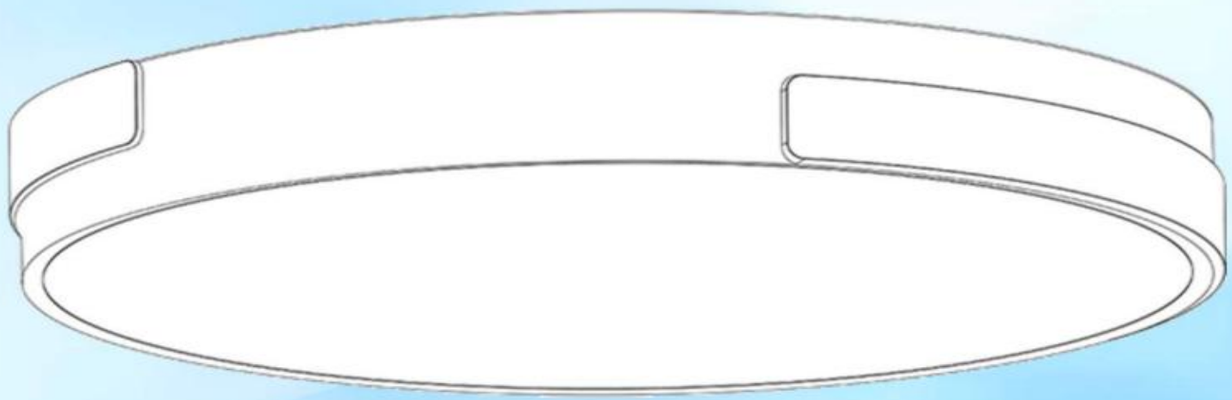

CEILING/ DOWN LIGHT

SLIM CEILING PANEL(FULL PC)

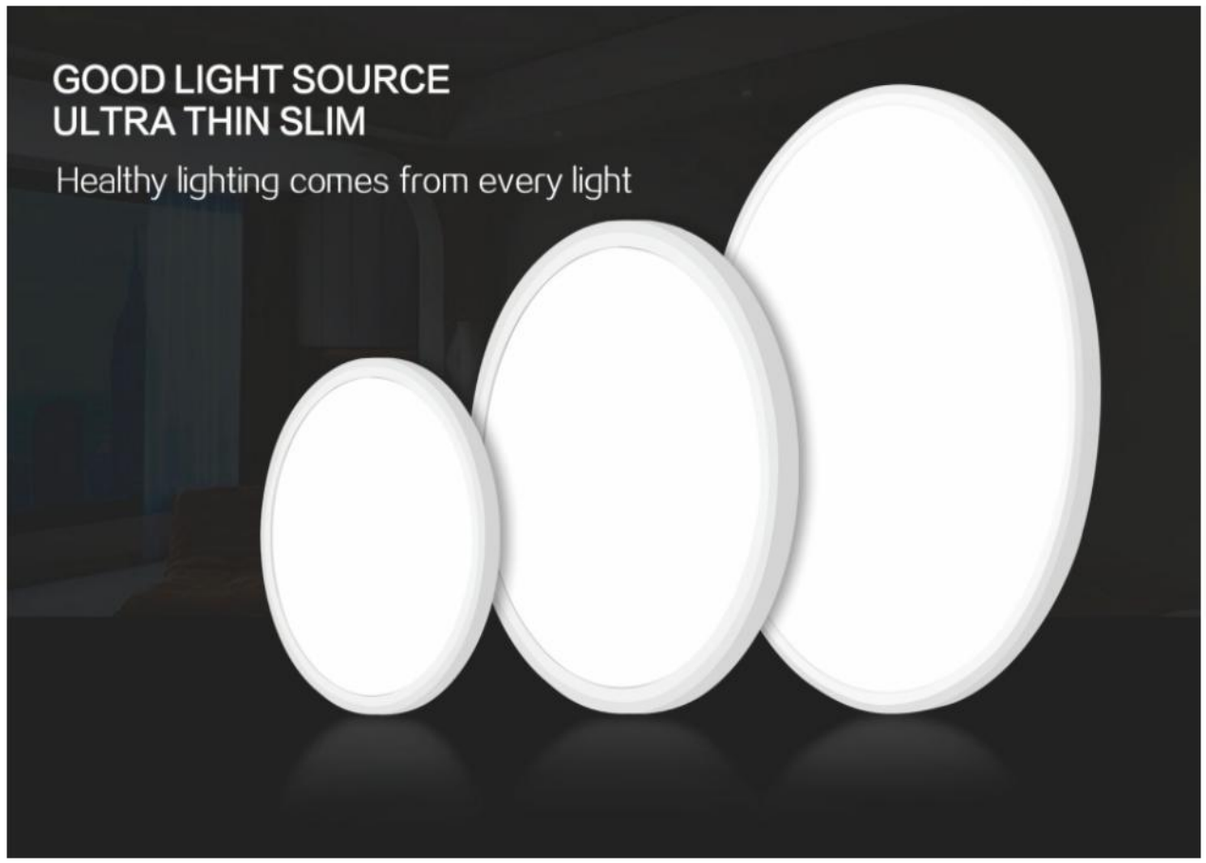

Product features:

1.Slim ceiling panel, only 2.5cm thickness.
2.Surface mounting, easy for installing.
3.PC frame and body....lower cost.
4.Uniform light with 3.0 LGP.





Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLF-300PC	Φ290*25	24	2700-6500K	Ra≥80/90	80-100LM/W	1920-2400LM	PC+PS LGP
ZLF-400PC	Φ390*25	36	2700-6500K	Ra≥80/90	80-100LM/W	2880-3600LM	PC+PS LGP
ZLF-500PC	Φ490*25	40/48	2700-6500K	Ra≥80/90	80-100LM/W	3200-4800LM	PC+PS LGP

LED DINING LIGHT



Product features:

1.Ultra thin elegant design for dining room

2. Die casting Aluminum Frame

3. Surface mounted / Suspension / Ra 80, 90, 95 optiona

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLPA-MH-R	φ600mm	45W	2700-6500K	Ra≥80/90	80-100LM/W	3600-4500LM	Aluminum
ZLPA-MH-S	600*600mm	45W	2700-6500K	Ra≥80/90	80-100LM/W	3600-4500LM	Aluminum

SLIM ROUND/SQUARE PANEL



Product features:

1. Surface mounted with build-in driver, thickness 25mm, 16mm is optional, Full Spectrum optional, day-night rhythm optional

2. Material of Frame and back cover: PC


3. Comply with CE-LVD & EMC & CB & NEW ERP

4. Easy surface mount installation

5. Expanded options: CCT selectable, Smart control

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLCG-BY230	φ230*25mm	18W	2700-6500K	Ra≥80/90	80-100LM/W	1440-1800LM	PC
ZLCG-BY300	φ300*25mm	30W	2700-6500K	Ra≥80/90	80-100LM/W	2400-3000LM	PC
ZLCG-BY400	φ400*25mm	38W	2700-6500K	Ra≥80/90	80-100LM/W	3040-3800LM	PC
ZLCG-BY500	φ500*25mm	48W	2700-6500K	Ra≥80/90	80-100LM/W	3840-4800LM	PC

SMART ROUND PANEL

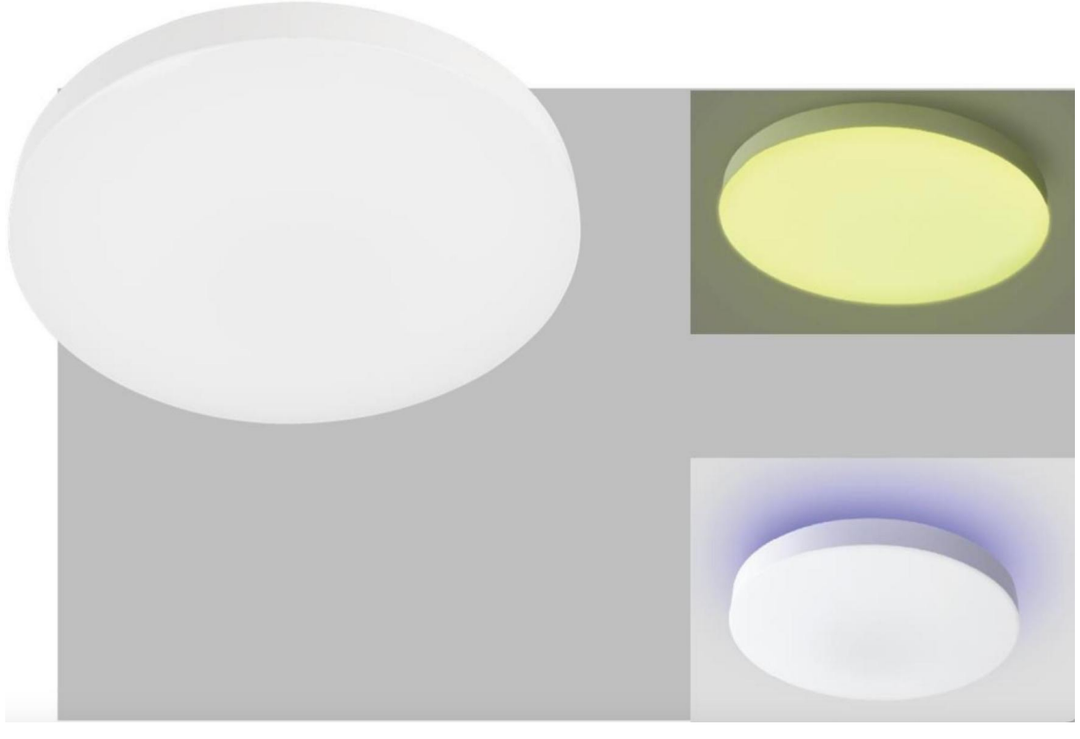

Product features:

1. Surface mounted with build-in driver, thickness 25mm is optional, Full Spectrum optional, day-night rhythm optional

2. Material of Frame and back cover: PC

3. Comply with CE-LVD & EMC & CB & NEW ERP

4. Easy surface mount installation

5. Expanded options: CCT selectable, Smart control, Voice control

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLZF-HK300	φ300*60mm	30W	RGB/RGB+CCT	Ra≥80/90	/	/	PC
ZLZF-HK380	φ380*60mm	36W	RGB/RGB+CCT	Ra≥80/90	/	/	PC
ZLBF-HK300	φ300*60mm	30W	RGB/RGB+CCT	Ra≥80/90	/	/	PC
ZLBF-HK380	φ380*60mm	36W	RGB/RGB+CCT	Ra≥80/90	/	/	PC

SLIM CEILING PANEL





Product feature:

1. High luminous efficiency can be up to 130LM/W

2. Frame color can be selected: White, Black, Golden, Silver, Rose red and etc

3. Sensor, Dimming, 3CCT, etc select optional

4. Material: PP+PP

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLMM-DP220	φ220*65mm	12W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC
ZLMM-DP270	φ270*65mm	18W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC
ZLMM-DP320	φ320*65mm	24W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC
ZLMM-DP370	φ370*65mm	36W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC

APPLICATION DISPLAY



Areas of application:

Offices, Meeting room, Airport lounges, Super market,

Bank & ATM outlets, shipping mall, Schoold, Hospital...etc

IP65 CEILING LIGHT





Product feature:

1. Material: PC
2. 120°beam angle
3. Different finish color optional
4. Microwave and Emergency optional

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLMY-260A	φ260*90mm	12W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC
ZLMY-320A	φ320*90mm	18W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC
ZLMY-360A	φ360*110mm	24W	2700K-6500K	Ra≥80/90	100-120LM/W	1200-1440LM	PC

LED CEILING LIGHT









Product feature:

1. Material: PC
2. 120°beam angle
3. Different finish color optional
4. Microwave and Emergency optional

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLCL-Y150	φ150*49mm	8W	2700K-6500K	Ra≥80/90	100-120LM/W	800-960LM	PC
ZLCL-Y190	φ190*49mm	14W	2700K-6500K	Ra≥80/90	100-120LM/W	1400-1680LM	PC
ZLCL-T192	192*96*43mm	8W	2700K-6500K	Ra≥80/90	100-120LM/W	800-960LM	PC
ZLCL-T120	210*105*43mm	14W	2700K-6500K	Ra≥80/90	100-120LM/W	1400-1680LM	PC

CCT DOWN LIGHT



Product feature:

1.Advanced thermal conductive plastic radiator

2.Built-in driver,fit for most of branded dimmersincluding leading edge dimmer

3.IC-4,IC-F rated

4.Lumen efficiency can up to 100lm/w

5.Tri-colour design,can reduce your stock

6.Trailing edge,0-10V,DALI/DSI,Smart control optional

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-01-V2	φ92XH62mm	6W/8W	2700K-6500K	CRI80	100LM/W	600-800LM	Plastic
ZLDL-02-V2	φ110XH70mm	8W/10W/12W	2700K-6500K	CRI80	100LM/W	800-1000-1200LM	Plastic

CCT DOWN LIGHT With SENSOR



Product feature:

1.Thermal conductive plastic coated aluminum housing,V-0 flame rating

2.220-240V built-in driver,integrated design

3.IC-4 rated

4.Non dimmable/Triac dimmable available

5.Gimbal fascia design and can be used on some special area

6.Tri-colour design,can reduce your stock

7.Dimmer Type:Trailing edge,0-10V,DALI/DSI,Smart control

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-01-VS2	φ115X60mm	6W	2700K-6500K	CRI80	100LM/W	600LM	Plastic
ZLDL-02-VS2	φ115X60mm	8W	2700K-6500K	CRI80	100LM/W	800LM	Plastic

CCT DOWN LIGHT



Product feature:

1.Thermal conductive plastic coated aluminum housing,V-0 flame rating

2.220-240V built-in driver,integrated design

3.IC-4 rated

4.Non dimmable/Triac dimmable available

5.Gimbal fascia design and can be used on some special area

6.Tri-colour design,can reduce your stock

7.Dimmer Type:Trailing edge,0-10V,DALI/DSI,Smart control

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-03-V2	φ108X48mm	8W/10W	2700K-6500K	CRI80	100LM/W	800-1000LM	Plastic
ZLDL-03-VF2	φ108X48mm	8W/10W	2700K-6500K	CRI80	100LM/W	800-1000LM	Plastic
ZLDL-03-WF2	φ108X48mm	8W/10W	2700K-6500K	CRI80	100LM/W	800-1000LM	Plastic

CCT DOWN LIGHT

Product feature:

1.Integral dimmable driver,perfect smooth phase dimming to create required lighting level.

2.A versatile design supplied with flex and plug fitted for easy installation

3.High efficiency SMD LED chips

4.CRI>80,selectable CCT 3000/4000/5700K,beam distribution 60 degre,UGR<19

5.Polyamide trim and body form in white or black

6.Low glare,suitable for residential and commercial applications mininising direct glarewhilst still providing even and effective illumination,

7.IC-4,IC-F rated

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-13	φ105X70mm	10W	2700K-6500K	CRI80	100LM/W	1000LM	Plastic
ZLDL-13-RF	φ105X70mm	10W	2700K-6500K	CRI80	100LM/W	1000LM	Plastic

LED DOWN LIGHT







Product feature:


1. Body Material :Dia-casingAluminum Body
2. Optical System :Reflector +Tempered glass
3. Finish :Environmentally safe powder coat
4. Installation :Recessed /Fixed
5. Suitable for high demand public places such aslarge banquet halls and hotellobbies
6. LEDType :COB
7. Driver :Exernal constant current driverincluded
8.Driver option :on/offor triac dimming or 0/1-10V dimming or DALI

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-208R	φ160X110mm	30W	2700K-6500K	CRI80	130LM/W	3900LM	Die-casing AL
ZLDL-208R	φ190X130mm	40W	2700K-6500K	CRI80	130LM/W	5200LM	Die-casing AL

LED DOWN LIGHT







Product feature:

1. Body Material: Dia-casingAluminum Body
2. Optical System: Refector+Tempered glass
3. Finish: Environmentally safe powder coat
4. Installation: Recessed /Fixed
5. Suitable for high demand public places such as large banquet halls and hotellobbies
6. LEDType :COB
7. Driver :Exernal constant current driverincluded
8. Driver option :on/offor triac dimming or 0/1-10V dimming or DALI

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-209R	φ165X170mm	25W	2700K-6500K	CRI80	115LM/W	2800LM	Die-casing AL
ZLDL-209R	φ195X200mm	35W	2700K-6500K	CRI80	115LM/W	4000LM	Die-casing AL

LED DOWN LIGHT






Product feature:

1. Body Material :Dia-casingAluminum Body
2. Finish :Environmentally safe powder coat
3. Installation :Recessed /Fixed
4. Suitable for office buildings,hotels,shopping malls,etc
5. LEDType :COB or SMD
6. Driver :Exernal constant current driverincluded
7. Driver option :on/offor triac dimming or 0/1-10V dimming or DALI

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-01XA	φ122X68mm	20W	2700K-6500K	CRI80	100LM/W	2000LM	Die-casing AL
ZLDL-01XB	φ155X75mm	30W	2700K-6500K	CRI80	100LM/W	3000LM	Die-casing AL
ZLDL-01XC	φ185X83mm	40W	2700K-6500K	CRI80	100LM/W	4000LM	Die-casing AL

LED DOWN LIGHT





Product feature:

1. Body Material: Dia-casingAluminum Body
2. Optical System: Lens
3. Finish: Powder spraying+plating
4. Installation: Recessed /Fixed
5. Suitable for office buildings, hotels, shopping malls, etc
6. LEDType :COB
7. Driver :Exernal constant current driverincluded
8. Driver option :on/offor triac dimming or 0/1-10V dimming or DALI

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-R75	φ82X63mm	15W	2700K-6500K	CRI80	100LM/W	1500LM	Die-casing AL
ZLDL-R85	φ93X71mm	18W	2700K-6500K	CRI80	100LM/W	1800LM	Die-casing AL
ZLDL-R95	φ104X79mm	20W	2700K-6500K	CRI80	100LM/W	2000LM	Die-casing AL

LED DOWN LIGHT







Product feature:

1. Body Material: Dia-casingAluminum Body
2. Optical System: PC cover
3. Finish: Environmentally safe powder coat
4. Installation: Recessed /Fixed
5. Suitable for office buildings, hotels, shopping malls, etc
6. LEDType :SMD
7. Driver :External constant current LED driverincluded
8. Driver option :on/offor triac dimming or 0/1-10V dimming or DALI

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-Y01	183X100X43mm	2*5W	2700K-6500K	CRI80	80LM/W	2*400LM	Die-casing AL
ZLDL-Y01	220X120X43mm	2*7W	2700K-6500K	CRI80	80LM/W	2*560LM	Die-casing AL

LED DOWN LIGHT








Product feature:

1. Body Material: Dia-casingAluminum Body
2. Optical System: Reflector+Tempered glass
3. Finish: Environmentally safe powder coat
4. AdjustableAngle: Lamp head can be adjusted at 45°
5. Installation: Recessed /Adjustable
6. Suitable for office buildings, hotels, shopping malls, etc
7. LEDType :COB
8. Driver :Exernal constant current LED driverincluded
9. Driver option :on/offor triac dimming or 0/1-10V dimming or DALI


Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLDL-01XM	φ138X76mm	12W	2700K-6500K	CRI80	100LM/W	1200LM	Die-casing AL
ZLDL-01XM	φ158X86mm	20W	2700K-6500K	CRI80	100LM/W	2000LM	Die-casing AL
ZLDL-01XM	φ180X86mm	30W	2700K-6500K	CRI80	100LM/W	3000LM	Die-casing AL

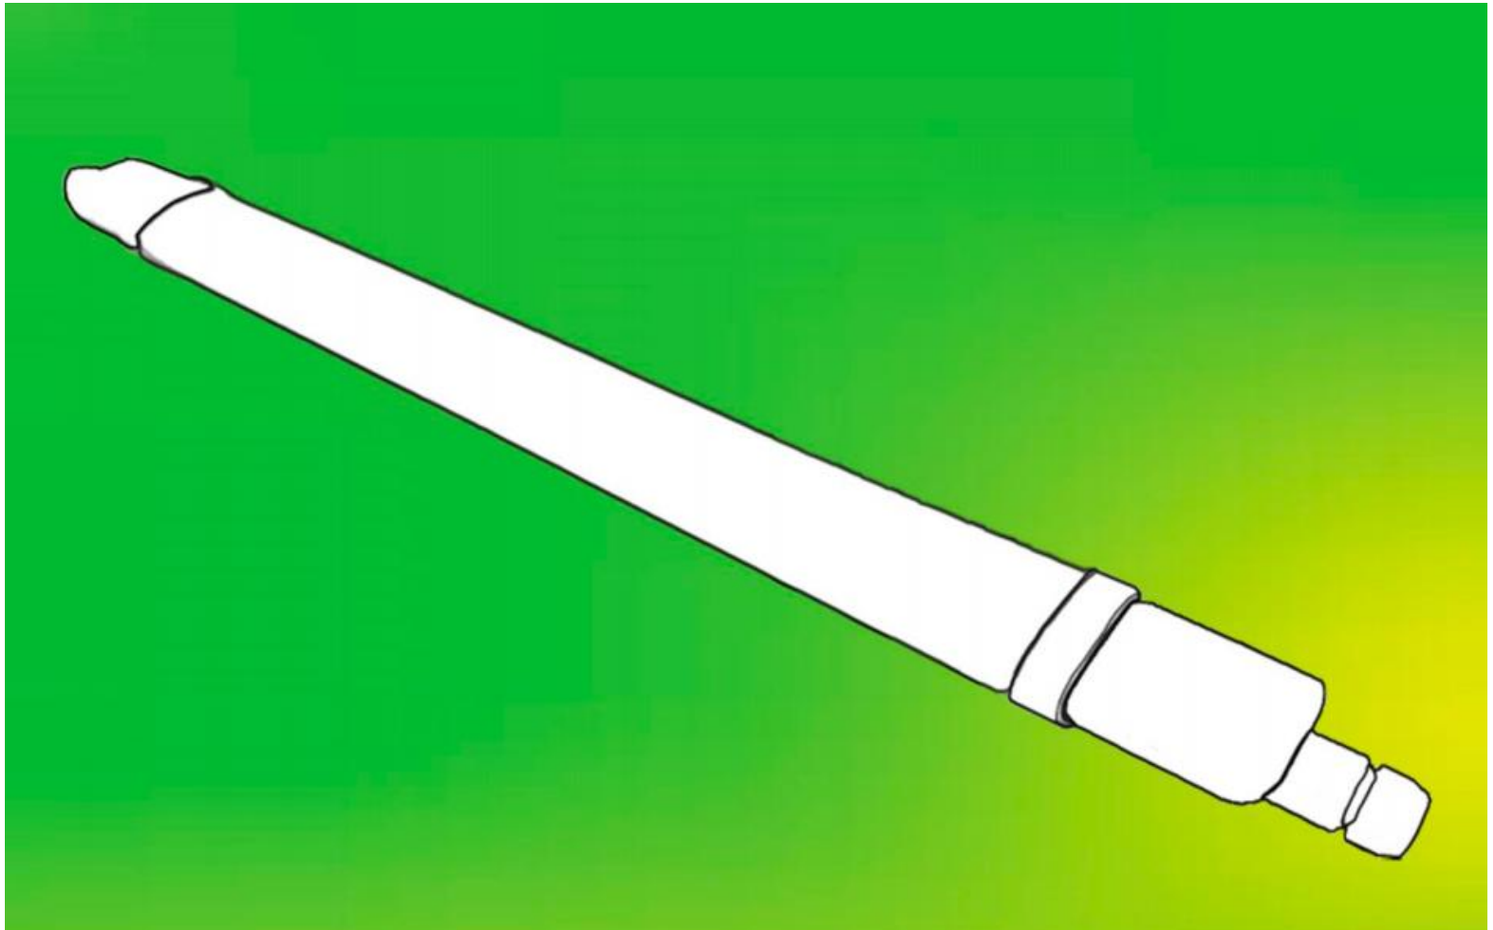


TRI-PROOF LIGHT

IP65 WATERPROOF LIGHT





Ambient light 50-100 lux
The lights turn on automatically



Ambient light 200-300 lux
The lights turn off automatically



Product feature:

1. IP rating of IP65 and is therefore suitable for both inddor & outdoor Applications
2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops
3. Self-contained LED batten offers performance combined with low energy consumption. Anti-corrosive fitting
4. IP65 waterproof design with constant illumination sensor

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLGE-A8060	600*80*45mm	24W	2700-6500K	Ra>80/90	100-150LM/W	2400-3600LM	PC
ZLGE-A80120	1200*80*45mm	48W	2700-6500K	Ra>80/90	100-150LM/W	4800-7200LM	PC
ZLGE-A8015(	1500*80*45mm	60W	2700-6500K	Ra>80/90	100-150LM/W	6000-9000LM	PC

IP65 WATERPROOF LIGHT





Product feature:

1. IP rating of IP65 and is therefore suitable for both inddor & outdoor Applications
2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLGE-A5860	600*58*34mm	18W	2700-6500K	Ra>80/90	100-150LM/W	1800-2700LM	PC
ZLGE-A58120	1200*58*34mm	36W	2700-6500K	Ra>80/90	100-150LM/W	3600-5400LM	PC

IP65 WATERPROOF LIGHT P50-P90






Product feature:

1. IP rating of IP65 and is therefore suitable for both inddor & outdoor Applications

2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops

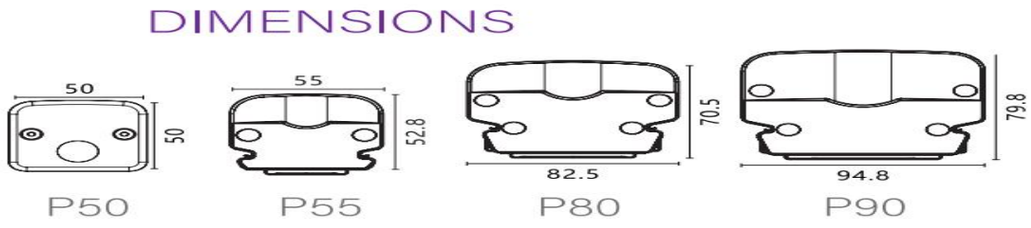

IP65 WATERPROOF LIGHT R60-R90






Product feature:

1. IP rating of IP65 and is therefore suitable for both inddor & outdoor Applications

2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops

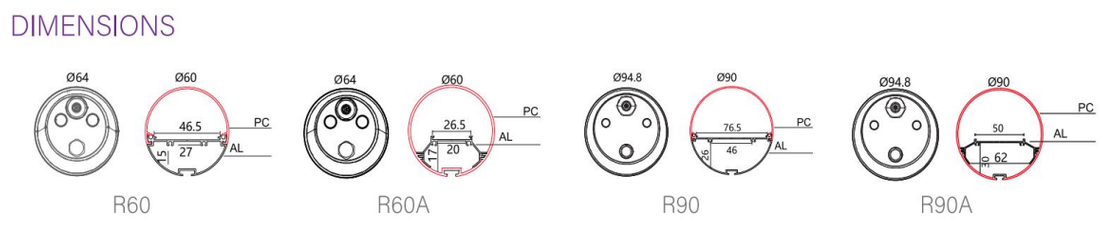

IP65 WATERPROOF LIGHT P84/P132



DIMENSIONS




Product feature:

P rating of IP65 and is therefore suitable for both inddor & outdoor Applications


2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Housing
ZLGE-P84600	600*84*50mm	40W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P841200	1200*84*50mm	60W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P841500	1500*84*50mm	80W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P132600	600*132*50mm	80W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P1321200	1200*132*50mm	120W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P1321500	1500*132*50mm	150W	2700-6500K	Ra≥80	100-150LM/W	PC

IP65 WATERPROOF LIGHT P100/P100A

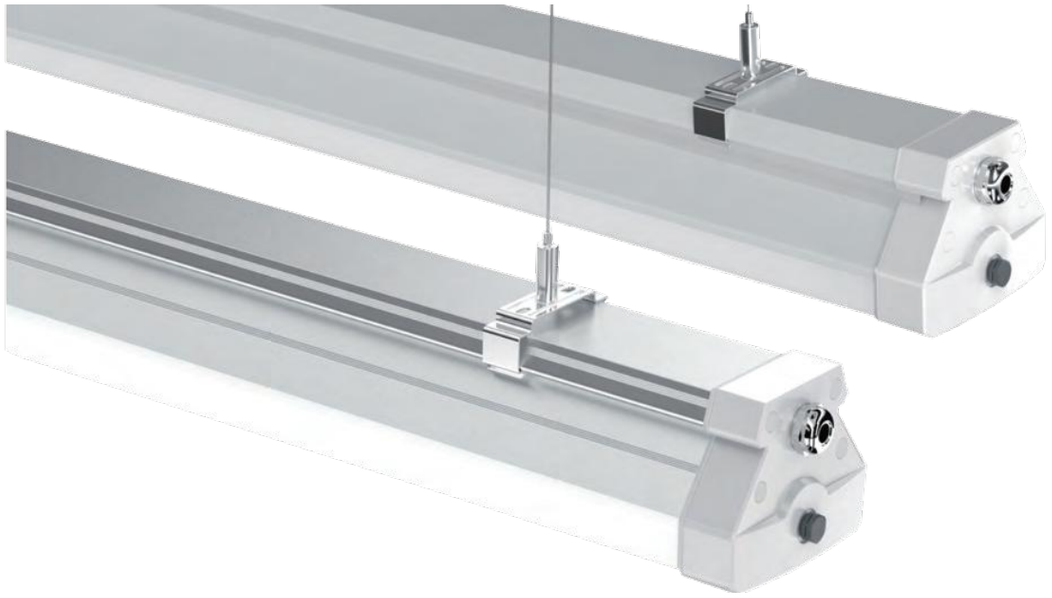

DIMENSIONS

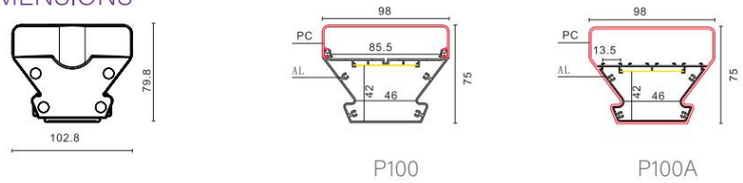

Product feature:


P rating of IP65 and is therefore suitable for both inddor & outdoor Applications

2. The batten is suitable for a wide range of commercial and industrial applications such as in warehouse, factories, parking lots, garages and workshops

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Housing
ZLGE-P100600	600*98*75mm	60W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P1001200	1200*98*75mm	90W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P1001500	1500*98*75mm	120W	2700-6500K	Ra≥80	100-150LM/W	PC
ZLGE-P100A600	600*98*75mm	60W	2700-6500K	Ra≥80	100-150LM/W	AL+ PC
ZLGE-P100A1200	120098*75mm	90W	2700-6500K	Ra≥80	100-150LM/W	Al+ PC
ZLGE-P100A1500	1500*98*75mm	120W	2700-6500K	Ra≥80	100-150LM/W	AL+ PC

APPLICATION DISPLAY



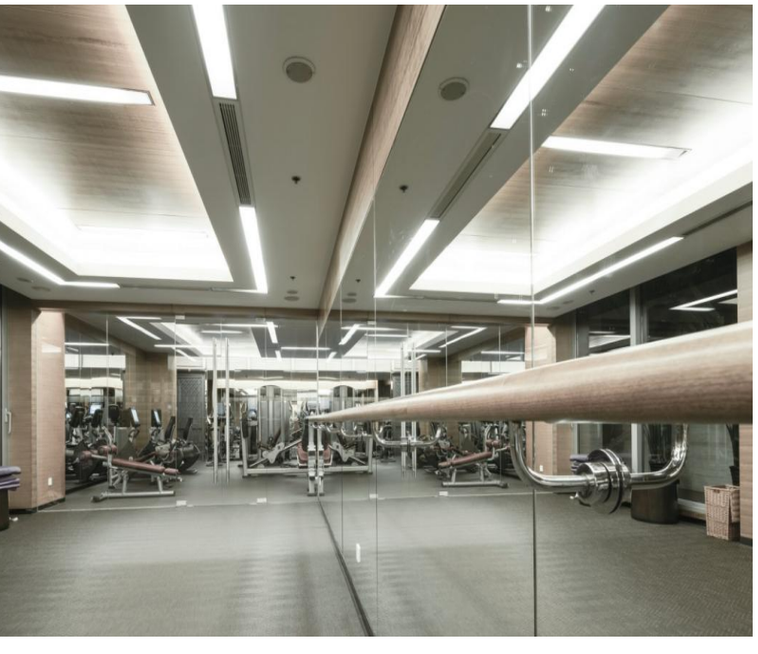



Areas of application:
Factory, corridor, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc

IP65 WATERPROOF EMPTY



Product feature:

1. offer uniform and comfortable light in the market

2. Tool-free clips can save labor cost

3. Compact design, more than 30% save on shipping & storage cost 4. Can be linkable

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLPZ-O2*60	665*113*85mm	/	/	/	/	/	PC
ZLPZ-O2*120	1265*113*85mm	/	/	/	/	/	PC
ZLPZ-O2*150	1565*113*85mm	/	/	/	/	/	PC

IP65 WATERPROOF SMD LIGHT





Product feature :

1. Offer very uniform and comfortable light without shadow at the edges
2. WATTS & CCT Selectable
3. Easy installation
4. Tool-free clips can save labor cost

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLPZ-T600	600*68*66mm	20W	2700K-6500K	Ra≥80/90	100-180LM/W	2000-3600LM	PC
ZLPZ-T1200	1200*68*66mm	40W	2700K-6500K	Ra≥80/90	100-180LM/W	4000-7200LM	PC
ZLPZ-T1500	1500*68*66mm	50W	2700K-6500K	Ra≥80/90	100-180LM/W	5000-9000LM	PC

IP65 WATERPROOF SMD LIGHT






Product feature:

1. Offer very uniform and comfortable light without shadow at the edges
2. WATTS & CCT Selectable
3. Easy installation
4. Tool-free clips can save labor cost


Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Material
ZLPZ-W600	600*73*67mm	20W	2700K-6500K	Ra≥80/90	100-180LM/W	2000-3600LM	PC
ZLPZ-W1200	1200*73*67mm	40W	2700K-6500K	Ra≥80/90	100-180LM/W	4000-7200LM	PC
ZLPZ-W1500	1500*73*67mm	50W	2700K-6500K	Ra≥80/90	100-180LM/W	5000-9000LM	PC


LINEAR
LIGHT

APPLICATION DISPLAY

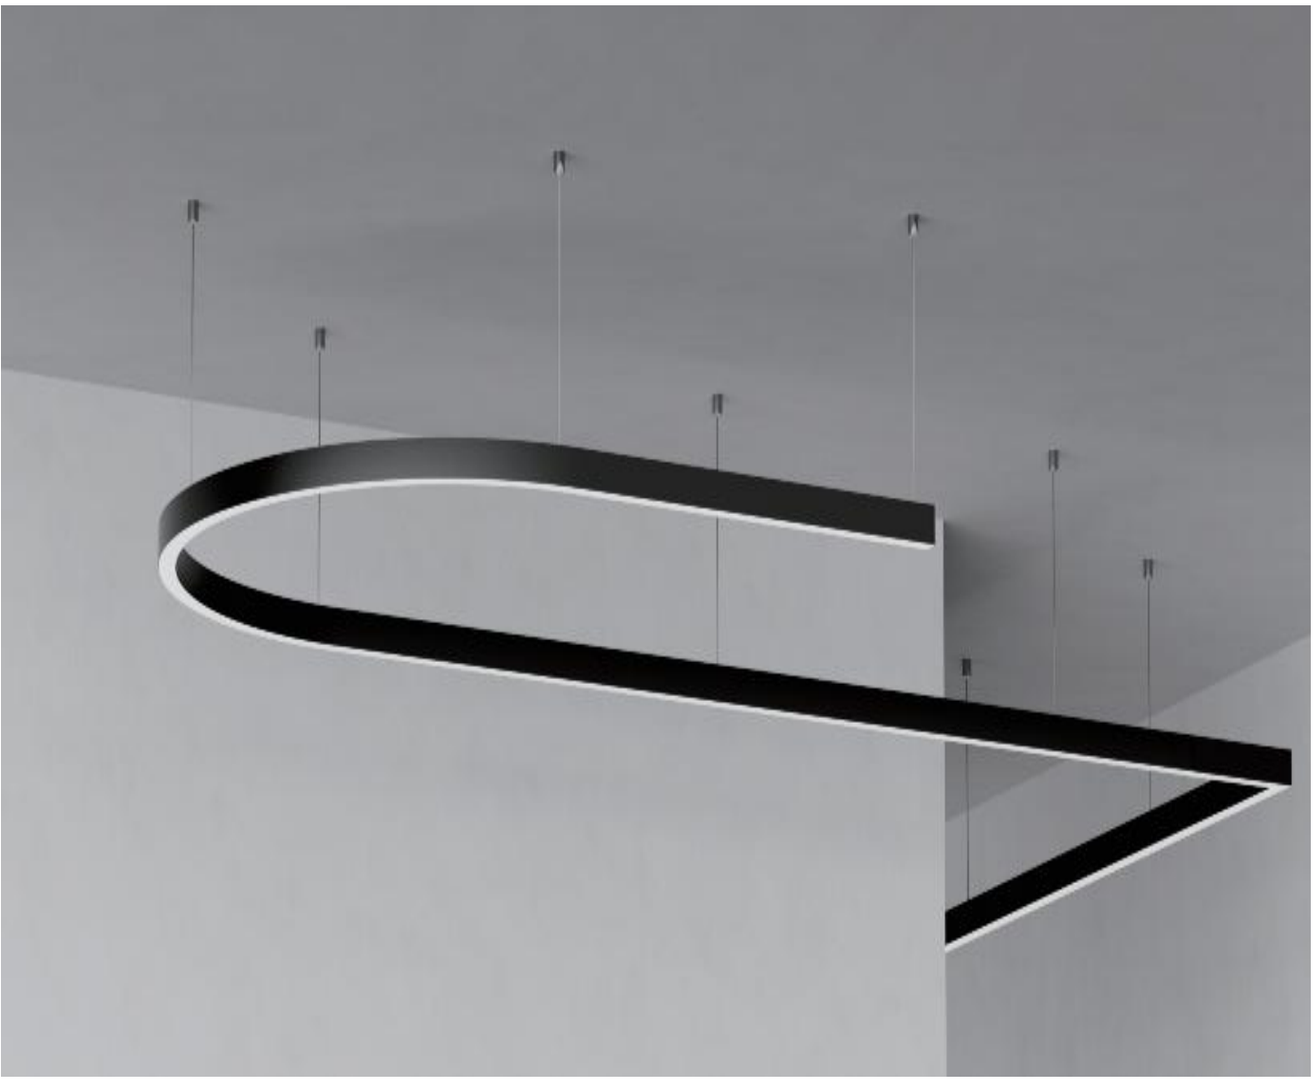

LINEAR LIGHT DIY COMBINATION---5070 SERIES

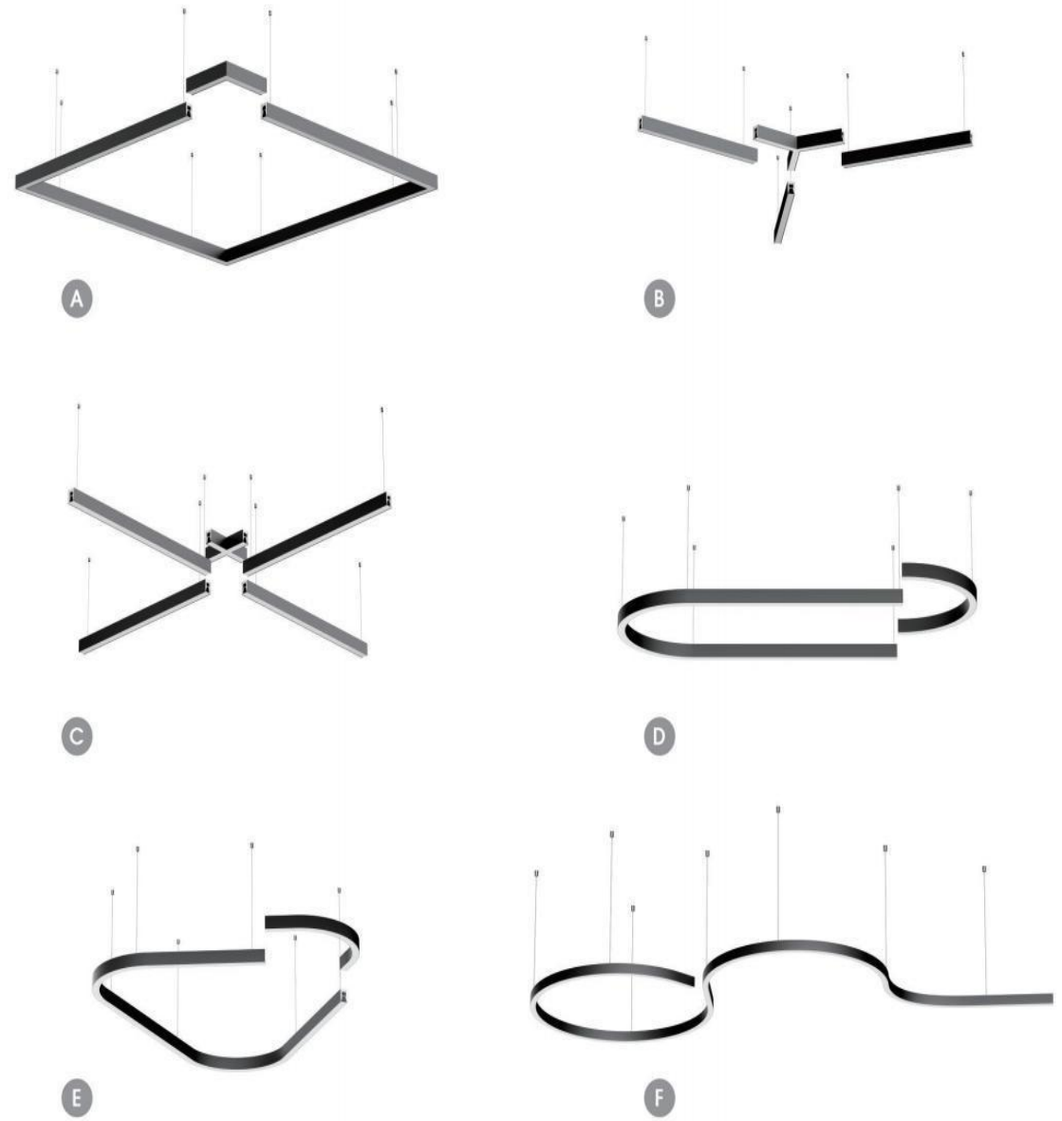

Product feature:

1. Made of metal materials, and its bent structure increases the overall stability to a certain extent.

2. The internal structure design effectively controls the direction of light propagation, allowing for the concentrated projection of light onto specific targets as per specific requirements

3. The interior is relatively enclosed, making it difficult for dust and other contaminants to enter.
It has a detachable design.
The surface is smooth and easy to wipe. It also facilitates the inspection and replacement of the internal lamps.

LINEAR LIGHT ---5070 SERIES





PC cover



50x70 aluminum material

Product feature:

1.Seamless connection over 20 meters with quick connector

2. Suspension, wall mounted, and spring mounted for convenient installation and maintenance

3. Up to 150lm/w high efficiency

4. Optional: Ra 90/95/99; UP-down lighting; 0-10V DALI dimming; Motion Sensor; Length customizable

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLGF-L5070	1209*50*75mm	40W	2700-6500K	Ra≥80/90	100-150LM/W	4000-6000LM	2 pcs/ctn

QUICK SPLICING---5070 SERIES



Spliced luminescence

The installation is simple and convenient.
The lamp bodies can be spliced.
After splicing and installing the chandelier, it can be lit up.
There is no need to consider the wiring issue inside the lamp body separately.



Control the light direction

Multi-directional bending, precise control of light emission
Make people feel more comfortable and relaxed.
Suitable for use in exquisite office areas.



Quick splicing

It can be spliced into various shapes and creatively combined.
Suitable for placement in various workstations
Meet various spatial scenarios and enrich office space

LINEAR LIGHT ---3880 SERIES





PC cover



38x80 aluminum material

Product feature:

1.The light body is with high quality aluminum and processed with electrostatic spraying.


2. PC efficient translucent material transparent plate with uniform light, no glare.

3. Siamese combination, to meet the connection requirements of different space and shapes.

4. Up + down lighting, beam angle 80 degree up + 100 degree down

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLGF-L3880	1206*38*80mm	Up:12W Dowm:30W	2700-6500K	Ra≥80/90	Up:60LM/W Down: 80LM/W	Up:720LM, Down:2400LM	4 pcs/ctn

OPTICAL DEVICE---3880 SERIES

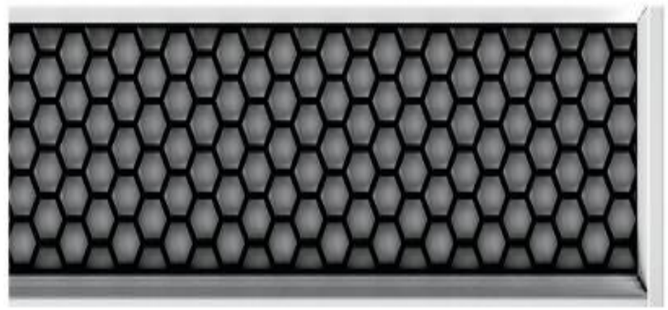

Honeycomb

It emits light at 100 degrees
It emits light at 70 degrees below



Diffusion plate

It emits light at 100 degrees
It emits light at 100 degrees below



Rhombic crystal

It emits light at 100 degrees
It emits light at 85° below




Grille

It emits light at 100 degrees
It emits light at 85° below

APPLICATION DISPLAY



LINEAR LIGHT---1810 SERIES

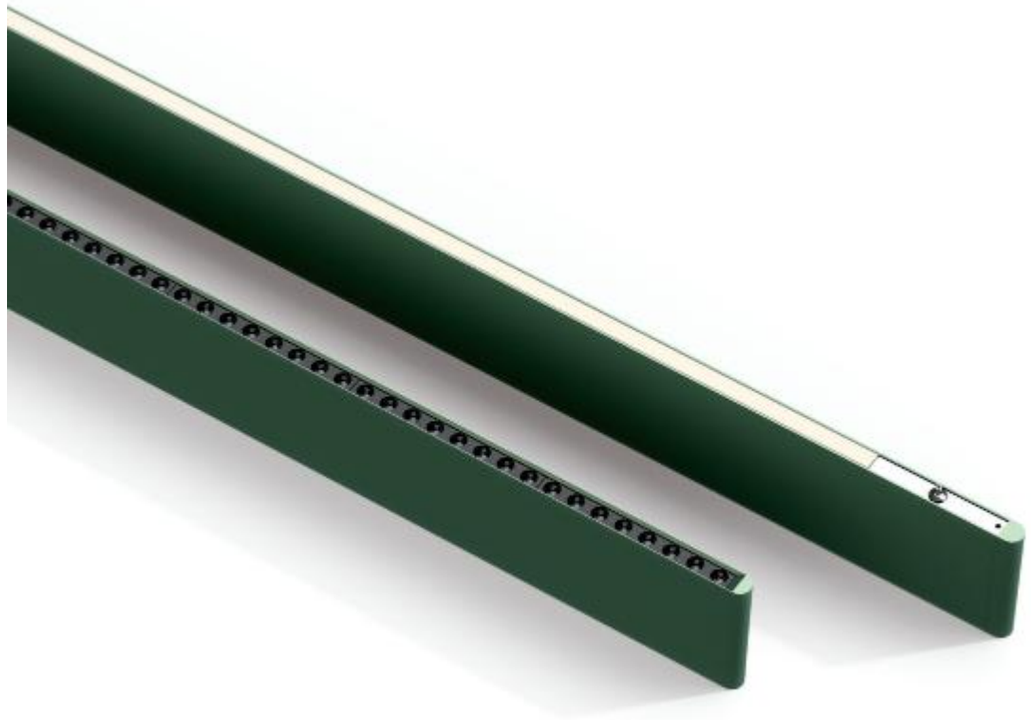

Product feature:

1. The lamp body has a simple and dynamic shape, with a variety of colors, enriching the office space.


2. It can be freely combined into various forms by four modules and flexibly applied in multiple Spaces.

3. It is convenient for users to install. The lamp body can be spliced. After splicing, the chandelier can be installed and the light will come on.

4. It is equipped with both lamp cup type and floodlight type.

Model	Szie(mm)	Power(W)	CCT	CRI	Light Efficiency	Lumens	Packing
ZLGF-L1880	1230*18*80mm	Up:12W Down:30W	2700-6500K	Ra≥80/90	Up:48LM/W Down: 48LM/W	Up:576LM, Down:1440LM	4 pcs/ctn

QUICK SPLICING---1810 SERIES

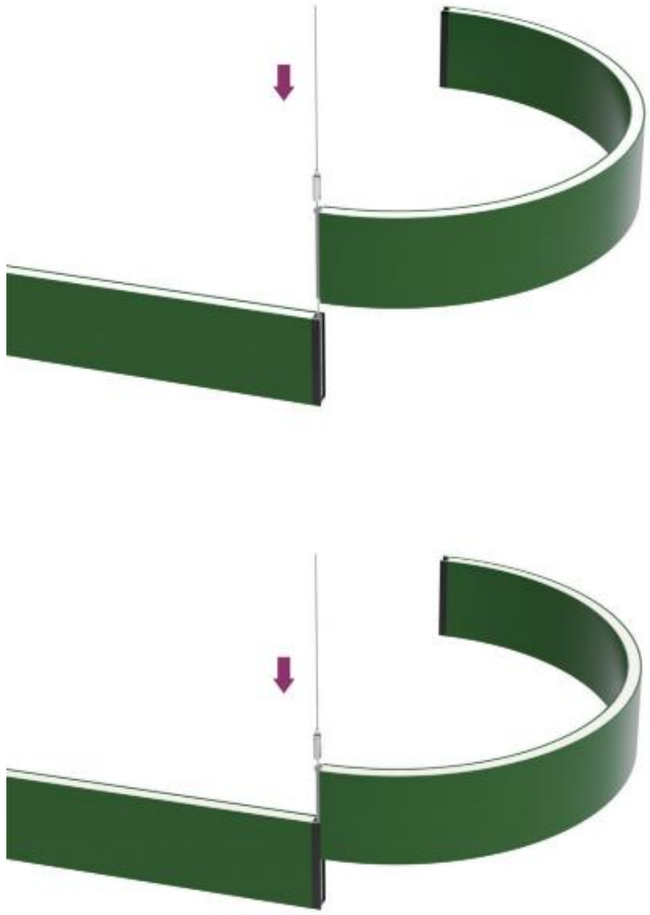

Spliced luminescence

The installation is simple and convenient. The lamp body can be spliced. After splicing and installing the chandelier, it will light up.
There is no need to consider the wiring issue inside the lamp body separately.

Glow from top to bottom


The upper and lower lighting creates a three-dimensional lighting space.
The downlight illuminates the entire office area.
The ceiling is illuminated to brighten up, making the space brighter
Make people feel more comfortable and relaxed.
Suitable for use in exquisite office areas.



Creative splicing

It can be spliced into various shapes, creatively combined, suitable for placement in multiple workstations, meeting various spatial scenarios, and enriching office space

LINEAR LIGHT DIY COMBINATION---1810 SERIES

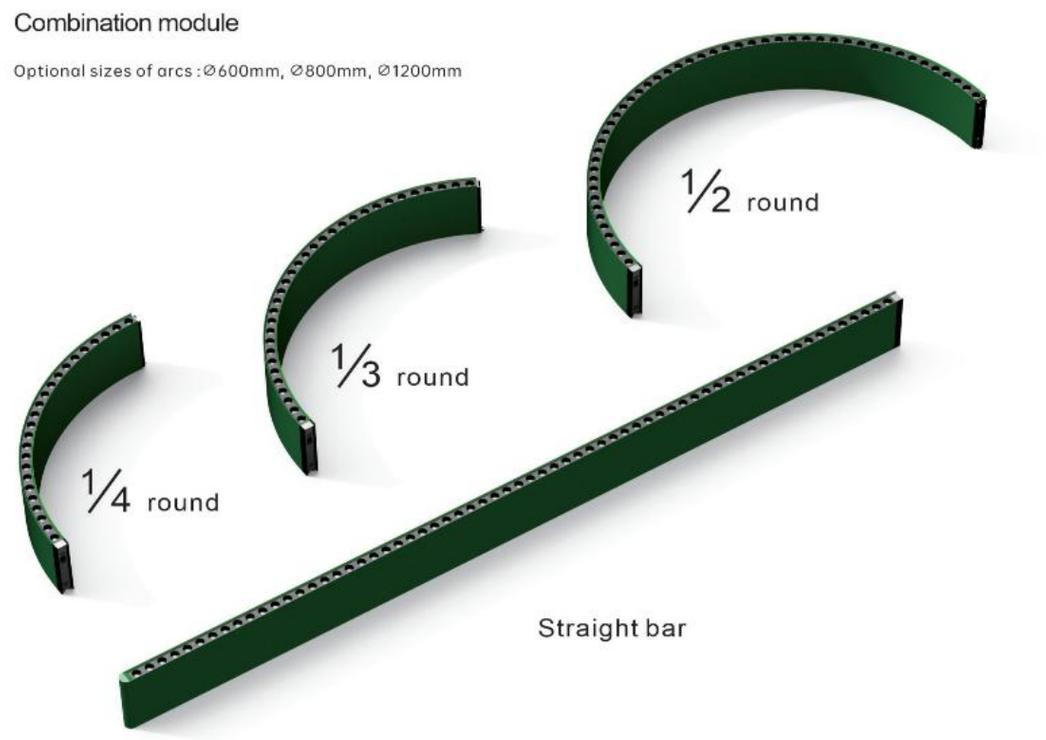

Technical parameters

Driving parameters	Input voltage	DC24V
	Power factor	0.5
	Other	External drive, constant voltage output
Light source model		OSRAM 3030
Color temperature		3000K | 4000K | 6000K
Color rendering index		Ra 90
SDCM		⩽3 STEPS
Color tolerance difference		N/A
Glare level		‹10
Luminous Angle		up 100°-down36°

Installation method/Location:	Hoisting/indoor
Lampshade:	Top: Milky white PC | Bottom: Lamp cup
Lumen of the lamp beads:	It emits light up to 80lm and down to 100lm
Optical accessories:	Lens + lamp cup
Dimming mode	1-10V/DALI is optional
Certification:	N/A
IP/IK:	IP20
Protection grade:	CLASS III
Service life:	50,000 HOURS
Warranty period:	Three years